


#### CORE SETS

##### Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma (1/A)$	core factor ( $C_1$ )	1.01	$\text{mm}^{-1}$
$V_e$	effective volume	340.38	$\text{mm}^3$
$l_e$	effective length	18.60	mm
$A_e$	effective area	18.30	$\text{mm}^2$
$A_{\min}$	minimum area	17.35	$\text{mm}^2$
$W_t$	mass of core set	$\approx 1.8$	g

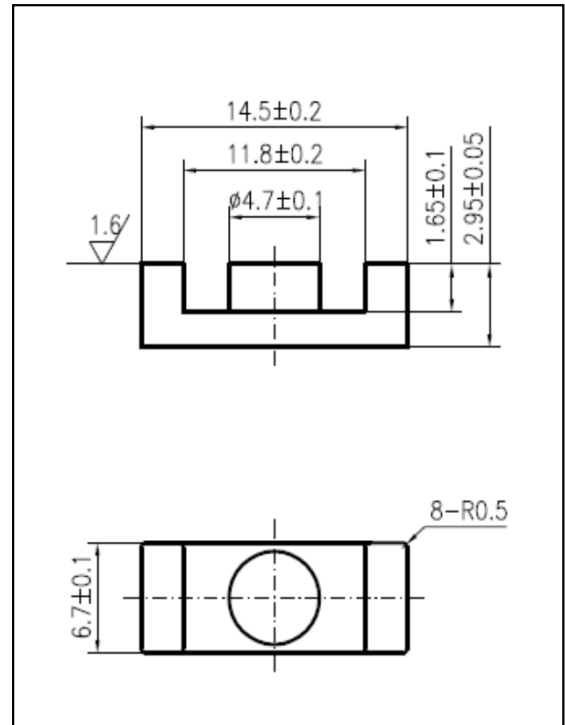

#### Characteristic

GRADE	AL ( $\text{nH/N}^2$ )	B (mT)	CORE LOSS (W)	
	f=10kHz U=0.25V	H=250A/m f=25kHz T=100°C	f=100kHz B=200mT T=100°C	
DMR40	1500 ± 25%	—	≤ 0.26	
DMR44	1500 ± 25%	—	≤ 0.22	
DMR95	2150 ± 25%	—	≤ 0.22	

GRADE	AL ( $\text{nH/N}^2$ )	B (mT)	CORE LOSS (W)	
	f=10kHz U=0.25V	H=250A/m f=25kHz T=100°C	f=500kHz B=50mT T=100°C	f=3MHz B=10mT T=100°C
DMR50B	1000 ± 25%	—	≤ 0.09	—