


### CORE SETS

#### Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma (1/A)$	core factor ( $C_1$ )	0.23	$\text{mm}^{-1}$
$V_e$	effective volume	146880.0	$\text{mm}^3$
$l_e$	effective length	183.6	mm
$A_e$	effective area	800.0	$\text{mm}^2$
$A_{\min}$	minimum area	799.3	$\text{mm}^2$
$W_t$	mass of core set	$\approx 740.0$	g

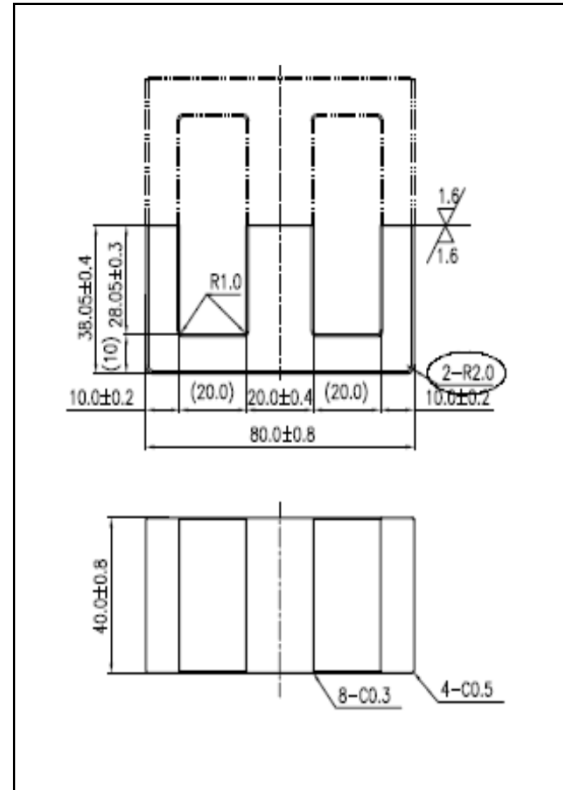

### Characteristic

GRADE	AL ( $\text{nH/N}^2$ )	B (mT)	CORE LOSS (W)
	f=10kHz U=0.25V	H=250A/m f=25kHz T=100°C	f=100kHz B=200mT T=100°C
DMR40	$9000 \pm 25\%$	$\geq 320$	$\leq 96.20$
DMR44	$9000 \pm 25\%$	$\geq 320$	$\leq 85.10$
DMR95	$12000 \pm 25\%$	$\geq 340$	$\leq 85.10$