


### CORE SETS

#### Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
$\Sigma (1/A)$	core factor ( $C_1$ )	0.33	$\text{mm}^{-1}$
$V_e$	effective volume	2048.9	$\text{mm}^3$
$l_e$	effective length	26.1	mm
$A_e$	effective area	78.5	$\text{mm}^2$
$A_{\min}$	minimum area	78.5	$\text{mm}^2$
$W_t$	mass of core set	$\approx 10.5$	g

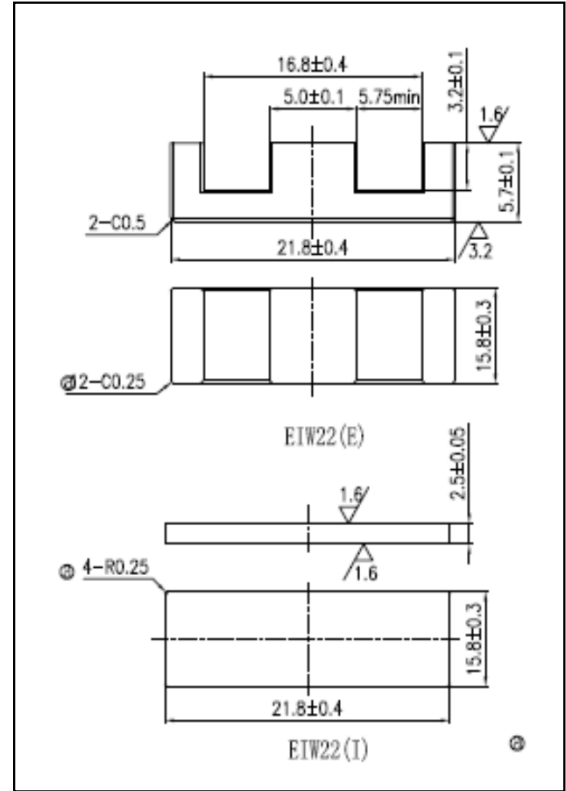

### Characteristic

GRADE	AL ( $\text{nH/N}^2$ )	B (mT)	CORE LOSS (W)
	f=10kHz U=0.25V	H=250A/m f=25kHz T=100°C	f=100kHz B=200mT T=100°C
DMR40	$5000 \pm 25\%$	$\geq 315$	$\leq 1.42$
DMR44	$5000 \pm 25\%$	$\geq 315$	$\leq 1.16$
DMR47	$5800 \pm 25\%$	$\geq 325$	$\leq 1.00$
DMR95	$6200 \pm 25\%$	$\geq 315$	$\leq 1.13$